

**MATERIAL CHARACTERISTICS**

<b>CONCRETE</b>	on a Polyester resin basis, with mineral fillers, additives
<b>COMPRESSIVE STRENGTH</b>	≥ 90 N/mm <sup>2</sup>
<b>BENDING STRENGTH</b>	≥ 22 N/mm <sup>2</sup>
<b>ELASTICITY MODULE</b>	25.000 – 35.000 N/mm <sup>2</sup>
<b>DENSITY</b>	2,1 – 2,3 kg/dm <sup>3</sup>
<b>COEFFICIENT OF LINEAR EXPANSION</b>	App. 1,45 x 10 <sup>-5</sup> 1/K
<b>HEAT RESISTANCE</b>	100°C continuous load, up to 200°C with a load duration up to 5 min.
<b>FROST RESISTANCE</b>	- 50°C
<b>WATER PENETRATION DEPTH</b>	0 mm
<b>WATER ABSORPTION</b>	< 0,05%
<b>MATERIAL STRUCTURE</b>	Capillary free

**PURPOSE OF USE**

Component for the line drainage of surfaces in order to collect, transport and discharge rainwater from adjacent fixed surfaces



\*\* Not suitable for the diagonal or transverse travel of motorways and highways.

# MEACRET LINE 200

A 15, B 125, C 250, D 400, E 600, F 900      nominal width 200

## MEACRET LINE 200 DRAINAGE CHANNEL WITH CONTINUOUS SLOT AND WITHOUT FALL

Drainage channel for drainage of paved surfaces. Drainage channel with continuous slot (slot width 50 mm) and without fall. Clear width of the channel body 200 mm, total width 450 mm. Special lengths on request. Loading classes A 15 to F 900 according to EN 1433. Load capacity according to MEA installation instructions.

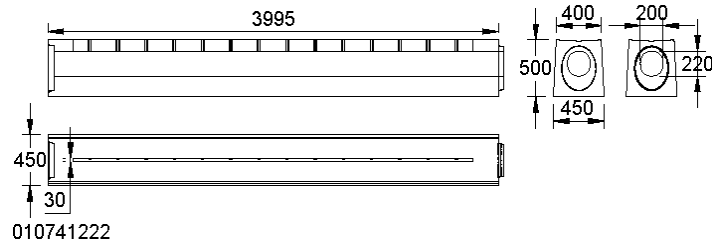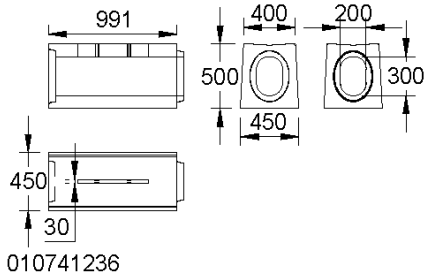

## MEACRET LINE 200 CHANNEL WITH CONTINUOUS SLOT, INTERNAL WIDTH 200 MM, WITHOUT FALL, LOADING CLASS F 900 ACCORDING TO DEN 1433

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 channel with continuous slot, without slope, internal height 300 mm, 1 m, F 900 *)	010741236	992	450	500	378,00
MEACRET LINE 200 channel with continuous slot, without slope, internal height 300 mm, 2 m, F 900 *)	010741234	1993	450	500	742,00
MEACRET LINE 200 channel with continuous slot, without slope, internal height 300 mm, 3 m, F 900 *)	010741232	2994	450	500	1100,00
MEACRET LINE 200 channel with continuous slot, without slope, internal height 200 mm, 4 m, F 900 *)	010741220	3995	450	500	1550,00
MEACRET LINE 200 channel with continuous slot, without slope, internal height 220 mm, 4 m, F 900 *)	010741222	3995	450	500	1535,00
MEACRET LINE 200 channel with continuous slot, without slope, internal height 240 mm, 4 m, F 900 *)	010741224	3995	450	500	1520,00
MEACRET LINE 200 channel with continuous slot, without slope, internal height 260 mm, 4 m, F 900 *)	010741226	3995	450	500	1505,00
MEACRET LINE 200 channel with continuous slot, without slope, internal height 280 mm, 4 m, F 900 *)	010741228	3995	450	500	1490,00
MEACRET LINE 200 channel with continuous slot, without slope, internal height 300 mm, 4 m, F 900 *)	010741230	3995	450	500	1470,00


\*) Delivery time on demand.

# MEACRET LINE 200


A 15, B 125, C 250, D 400, E 600, F 900      nominal width 200

## MEACRET LINE 200 DRAINAGE CHANNEL WITH CONTINUOUS SLOT AND WITH FALL 0,5%

Drainage channel for drainage of paved surfaces. Drainage channel with continuous slot (slot width 50 mm) and with fall 0,5%. Clear width of the channel body 200 mm, total width 450 mm. Special lengths on request. Loading classes A 15 to F 900 according to EN 1433. Load capacity according to MEA installation instructions.

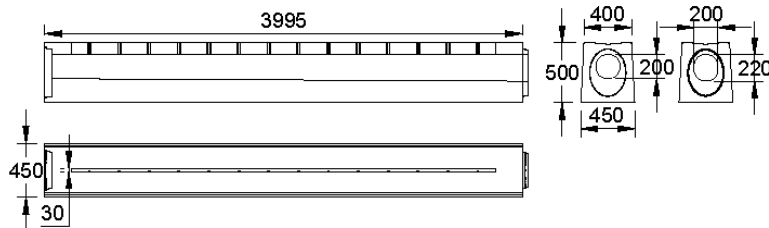

010741240

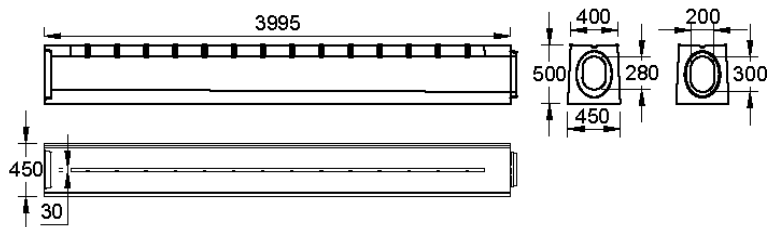

010741248

## MEACRET LINE 200 CHANNELS WITH CONTINUOUS SLOT, INTERNAL WIDTH 200 MM, WITH FALL 0,5%, LOADING CLASS F 900 ACCORDING TO EN 1433

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 channel with continuous slot, slope 0,5%, internal height 200 to 220 mm, 4 m, F 900 *)	010741240	3995	450	500	1650,00
MEACRET LINE 200 channel with continuous slot, slope 0,5%, internal height 220 to 240 mm, 4 m, F 900 *)	010741242	3995	450	500	1609,00
MEACRET LINE 200 channel with continuous slot, slope 0,5%, internal height 240 to 260 mm, 4 m, F 900*)	010741244	3995	450	500	1569,00
MEACRET LINE 200 channel with continuous slot, slope 0,5%, internal height 260 to 280 mm, 4 m, F 900 *)	010741246	3995	450	500	1530,00
MEACRET LINE 200 channel with continuous slot, slope 0,5%, internal height 280 to 300 mm, 4 m, F 900*)	010741248	3995	450	500	1492,00



\*) Delivery time on demand.

# MEACRET LINE 200

A 15, B 125, C 250, D 400, E 600, F 900      nominal width 200

## MEACRET LINE 200 DRAINAGE CHANNEL WITH INTERRUPTED SLOT AND WITHOUT FALL

Drainage channel for drainage of paved surfaces. Drainage channel with interrupted slot (slot width 50 mm) and without fall. Clear width of the channel body 200 mm, total width 450 mm. Special lengths on request. Loading classes A 15 to E 600 according to EN 1433. Load capacity according to MEA installation instructions.

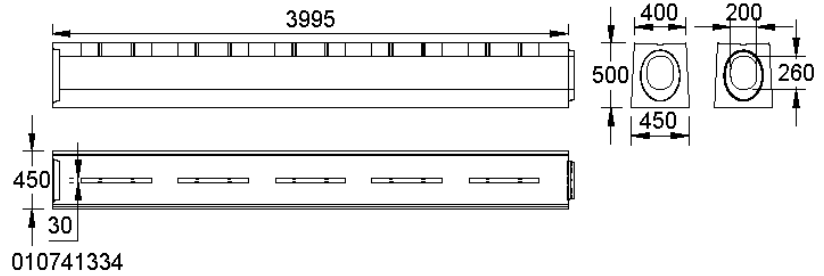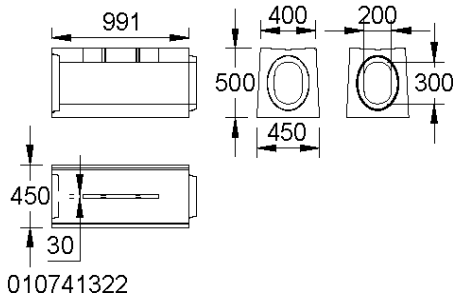

## MEACRET LINE 200 CHANNELS WITH INTERRUPTED SLOT, INTERNAL WIDTH 200 MM, WITHOUT FALL, LOADING CLASS E 600 ACCORDING TO EN 1433



Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 300 mm, 1 m, E 600 *)	010741322	992	450	500	378,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 300 mm, 2 m, E 600 *)	010741324	1993	450	500	749,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 300 mm, 3 m, E 600 *)	010741326	2994	450	500	749,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 200 mm, 4 m, E 600 *)	010741328	3995	450	500	1552,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 220 mm, 4 m, E 600 *)	010741330	3995	450	500	1537,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 240 mm, 4 m, E 600 *)	010741332	3995	450	500	1522,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 260 mm, 4 m, E 600 *)	010741334	3995	450	500	1507,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 280 mm, 4 m, E 600 *)	010741336	3995	450	500	1492,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 300 mm, 4 m, E 600 *)	010741338	3995	450	500	1500,00

\*) Delivery time on demand.

# MEACRET LINE 200

A 15, B 125, C 250, D 400, E 600, F 900

nominal width 200

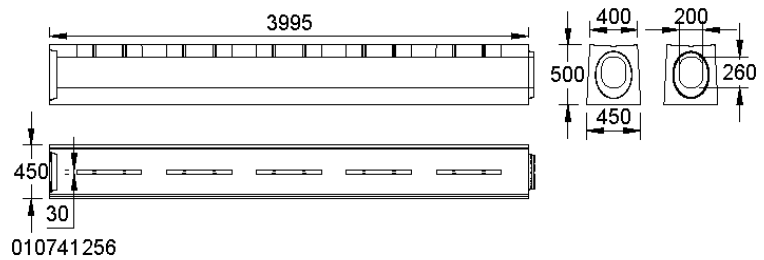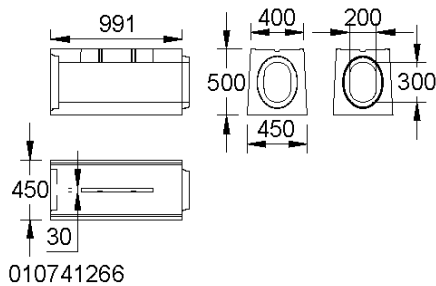

## MEACRET LINE 200 CHANNELS WITH INTERRUPTED SLOT, INTERNAL WIDTH 200 MM, WITHOUT FALL, LOADING CLASS E 600 ACCORDING TO EN 1433

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 300 mm, 1 m, F 900 *)	010741266	992	450	500	378,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 300 mm, 2 m, F 900 *)	010741264	1993	450	500	749,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 300 mm, 3 m, F 900 *)	010741262	2994	450	500	1115,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 200 mm, 4 m, F 900 *)	010741250	3995	450	500	1552,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 220 mm, 4 m, F 900 *)	010741252	3995	450	500	1537,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 240 mm, 4 m, F 900 *)	010741254	3995	450	500	1522,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 260 mm, 4 m, F 900 *)	010741256	3995	450	500	1507,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 280 mm, 4 m, F 900 *)	010741258	3995	450	500	1492,00
MEACRET LINE 200 channel with interrupted slot, without slope, internal height 300 mm, 4 m, F 900 *)	010741260	3995	450	500	1500,00


\*) Delivery time on demand.

# MEACRET LINE 200

A 15, B 125, C 250, D 400, E 600, F 900 nominal width 200


## MEACRET LINE 200 DRAINAGE CHANNEL WITH INTERRUPTED SLOT AND WITH FALL 0,5%

Drainage channel for drainage of paved surfaces. Drainage channel with interrupted slot (slot width 50 mm) and with fall 0,5%. Clear width of the channel body 200 mm, total width 450 mm. Special lengths on request. Loading classes A 15 to E 600 according to EN 1433. Load capacity according to MEA installation instructions.

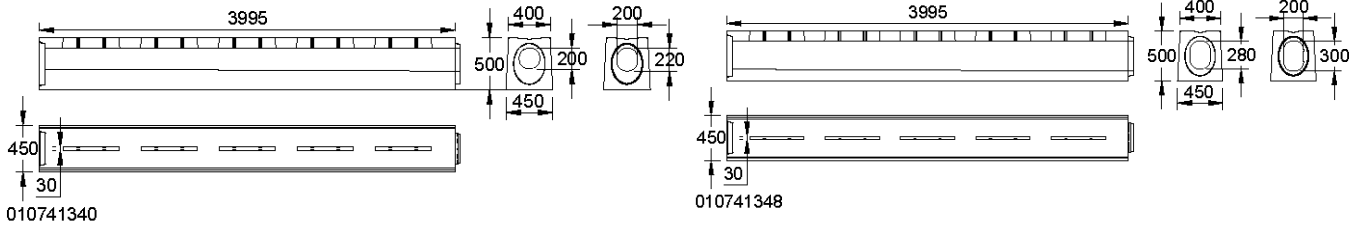

## MEACRET LINE 200 CHANNELS WITH INTERRUPTED SLOT, INTERNAL WIDTH 200 MM, WITH FALL 0,5%, LOADING CLASS E 600 ACCORDING TO EN 1433

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 200 to 220 mm, 4 m, E 600 *)	010741340	3995	450	500	1678,00
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 220 to 240 mm, 4 m, E 600 *)	010741342	3995	450	500	1638,00
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 240 to 260 mm, 4 m, E 600 *)	010741344	3995	450	500	1598,00
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 260 to 280 mm, 4 m, E 600 *)	010741346	3995	450	500	1559,00
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 280 to 300 mm, 4 m, E 600 *)	010741348	3995	450	500	1521,00

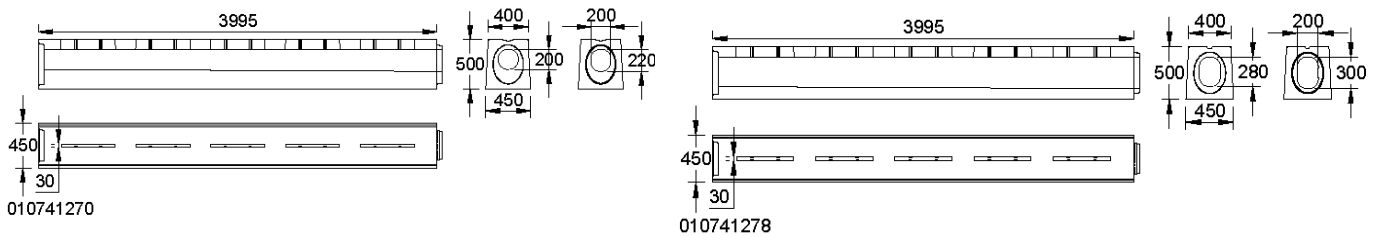

## MEACRET LINE 200 CHANNELS WITH INTERRUPTED SLOT, INTERNAL WIDTH 200 MM, WITH FALL 0,5%, LOADING CLASS F 900 ACCORDING TO EN 1433



Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 200 to 220 mm, 4 m, F 900 *)	010741270	3995	450	500	1678,00
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 220 to 240 mm, 4 m, F 900 *)	010741272	3995	450	500	1638,00
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 240 to 260 mm, 4 m, F 900 *)	010741274	3995	450	500	1598,00
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 260 to 280 mm, 4 m, F 900 *)	010741276	3995	450	500	1559,00
MEACRET LINE 200 channel with interrupted slot, slope 0,5%, internal height 280 to 300 mm, 4 m, F 900 *)	010741278	3995	450	500	1521,00

\*) Delivery time on demand.

# MEACRET LINE 200


A 15, B 125, C 250, D 400, E 600, F 900      nominal width 200

## MEACRET LINE 200 ACCESSORIES

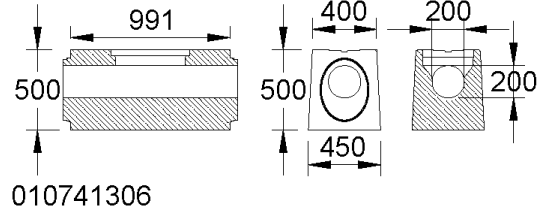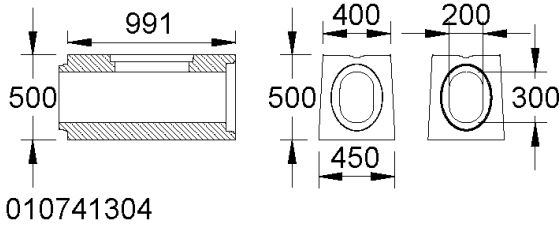

## MEACRET LINE 200 REVISION ELEMENT INCL. DUCTILE IRON-SLOTTED GRATING, INTERNAL WIDTH 200 MM, LOADING CLASS E 600/F 900 ACCORDING TO EN 1433

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 cleaning unit basic, internal height 300 mm, Tongue-Groove connection, including ductile iron grate, E 600/F 900 *)	010741304	991	450	500	337,00
MEACRET LINE 200 cleaning unit centre, internal height 200 mm, Tongue-Tongue connection, including ductile iron grate, E 600/F 900 *)	010741306	991	450	500	410,00

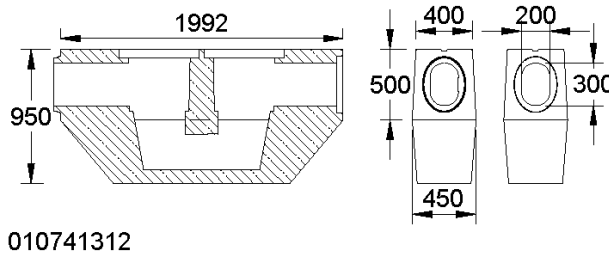

## MEACRET LINE 200 DWS DIVING-WALL-SHAFTS, WITH DUCTILE IRON COVER, INTERNAL WIDTH 200 MM, LOADING CLASS F 900 ACCORDING TO EN 1433

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 DWS diving-wall-shaft, internal height 300 mm, self-extinguishing, 2 m, F 900 *)	010741312	1992	450	500	1020,00



\*) Delivery time on demand.

# MEACRET LINE 200

A 15, B 125, C 250, D 400, E 600, F 900 nominal width 200




BUILDING SUCCESS

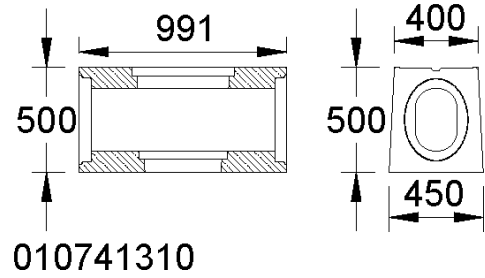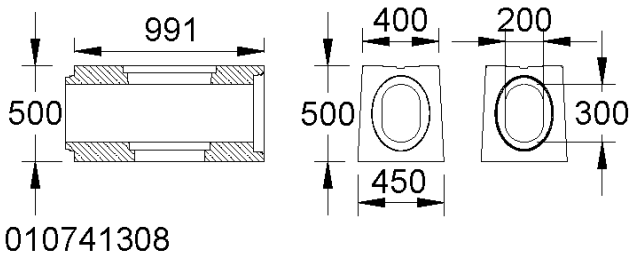

**MEACRET LINE 200 GULLY UPPER PARTS INCL. DUCTILE IRON-SLOTTED GRATING, INTERNAL WIDTH 200 MM, LOADING CLASS E 600/F 900 ACCORDING TO EN 1433**

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 Gully Upper-part, internal height 300 mm, Tongue-Groove connection, including basket small and ductile iron grate E 600/F 900 *)	010741308	991	450	500	265,00
MEACRET LINE 200 Gully Upper-part, internal height 300 mm, Groove-Groove connection, including basket small and ductile iron grate E 600/F 900 *)	010741310	991	450	500	265,00

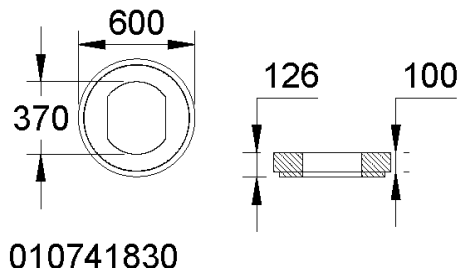

**MEACRET LINE 200 ADAPTER FOR GULLY UPPER PARTS TO GULLY INTERMEDIATE AND LOWER PARTS**

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 adapter plate gully upper part for gully intermediate part / gully lower part *)	010741830	600	600	100	53,00

\*) Delivery time on demand.





# MEACRET LINE 200

A 15, B 125, C 250, D 400, E 600, F 900 nominal width 200

## MEACRET LINE 200 GULLY INTERMEDIATE AND LOWER PARTS

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200 gully intermediate part, short, Ø 500 mm, height 290 mm *)	010741832	600	600	290	60,00
MEACRET LINE 200 gully intermediate part, long, Ø 500 mm, height 590 mm *)	010741834	600	600	590	120,00
MEACRET LINE 200 gully lower part with pipe socket Ø 160 mm *)	010741836	600	600	590	232,00
MEACRET LINE 200 gully lower part with pipe socket Ø 200 mm *)	010741838	600	600	590	232,00



## MEACRET LINE 200 END CAPS

Description	Order-No.	Length [mm]	Width [mm]	Height [mm]	kg/unit
MEACRET LINE 200.G Endcap with groove *)	010741314	150	450	500	66,00
MEACRET LINE 200.T Endcap with tongue *)	010741316	150	450	500	55,00

\*) Delivery time on demand.

This edition of the technical data sheet is valid on its own from October 2021, until a revised version is published, and replaces earlier publications. The current version is available for download at [www.mea-group.com](http://www.mea-group.com).

MEA Bautechnik GmbH  
 Business unit MEA Water Management  
 Sudetenstraße 1  
 86551 Aichach  
 Tel.: +49 (0) 82 51. 91 0  
 Fax: +49 (0) 82 51. 91 13 06  
 E-Mail: [info@mea-group.com](mailto:info@mea-group.com)  
[www.mea-group.com](http://www.mea-group.com)