

# MEAGARD® Yard Gully



## Material properties

### Body

- ◆ Polymer concrete based on polyester resin
- ◆ Compression resistance  $\geq 90 \text{ N/mm}^2$
- ◆ Flexural strength  $\geq 22 \text{ N/mm}^2$
- ◆ Water absorption below 0.05%
- ◆ Density 2.1-2.3  $\text{kg/dm}^3$
- ◆ Module of elasticity 25 – 35  $\text{kN/mm}^2$
- ◆ Water penetration depth 0 mm
- ◆ Material structure capillary free

### Grating covers

- ◆ Ductile iron
- ◆ Galvanized steel

- 
- ◆ Yard gully made of polymer concrete, with galvanized sediment bucket and odour trap
  - ◆ Connection option for outlet  $\varnothing 110$
  - ◆ Grating covers in various designs
  - ◆ Extremely durable material with outstanding properties

# Product overview

## Yard gully


Lower section made from polymer concrete with sediment bucket and odour trap; with outlet  $\varnothing$  110

Product description	Length mm	Total width mm	Total height mm	Weight kg	EDP number 010...
Yard gully with cast iron top frame and ductile iron grating cover Class B 125 as per EN 124	300	300	450	32,4	150850
Yard gully with cast iron top frame and galvanized mesh grating cover Class B 125 as per EN 124	300	300	450	30,4	150855
Yard gully with galvanized mesh grating MW 30 x 30 mm Withstands passenger vehicle load	300	300	450	23,1	150860

## Accessories

Product description	Length mm	Total width mm	Total height mm	Weight kg	EDP number 010...
Riser frame to increase the total height with pre-formed outlet $\varnothing$ 110, two-sided, e.g. to connect a down pipe from the roof drainage	282	282	250	11,3	150805
Compensating element for total height adjustment	282	282	60	3,4	150810

## Installation instruction

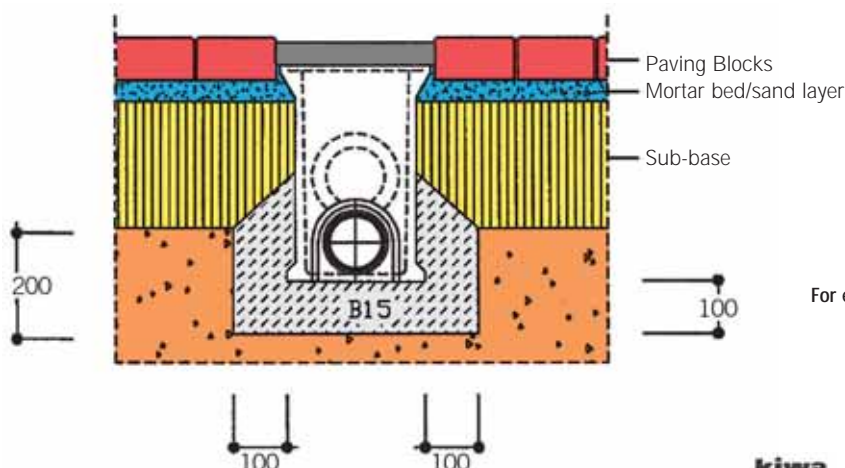

(Dimensions given in mm)

For enquiries in the UK and Ireland:

**MEA UK Limited**

Rectors Lane  
Pentre  
Deeside  
Flintshire  
CH5 2DH

Telephone: 0 12 44/53 44 55  
Fax: 0 12 44/53 44 77  
uk.technical@mea.de  
www.mea-group.com

For all other enquiries:

**MEA Polymer Beton B.V.**

Ambachtsweg 18  
7021 BT Zelhem  
P.O. Box 90  
7020 AB Zelhem  
The Netherlands

tel: (+31) 314 62 77 62  
fax: (+31) 314 62 77 77  
sales.info@nl.mea.de  
www.mea-group.com

